




GOODYEAR CL CLASSICAL

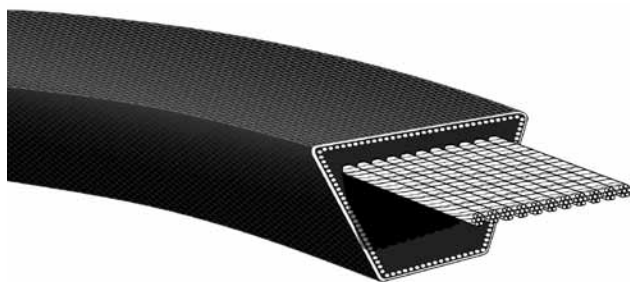

APPLICATIONS

Belts suitable for less demanding applications.


KEY FEATURES & BENEFITS

- Unversal classical profile to fit ISO 4183 pulleys.
- Low stretch polyester tensile member.
- Oil, ozone and abrasion resistant.
- Temperature resistance: -20°C to +70°C.
- Static conductive** (ISO 1813).

** Refer to Static Conductive Belts section (page 85).

GOODYEAR CL

Part No: 22C 4060
 22C 22 mm Top Width
 4060 4060 mm Datum Length

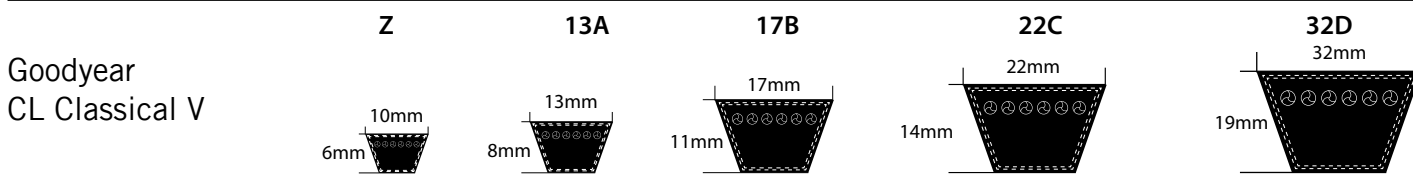

Z / A

Belt reference	Imperial reference (inch)	Inside length Li (mm)	Datum length Ld (mm)	Belt reference	Imperial reference (inch)	Inside length Li (mm)	Datum length Ld (mm)	Belt reference	Imperial reference (inch)	Inside length Li (mm)	Datum length Ld (mm)
Z 16	16	410	430	Z 34	34	865	887	Z 50,75	50,75	1295	1320
Z 17	17	430	450	Z 34,5	34,5	875	900	Z 51	51	1300	1324
Z 18	18	460	490	Z 35	35	890	915	Z 52	52	1320	1350
Z 19	19	480	510	Z 35,5	35,5	900	922	Z 53	53	1345	1368
Z 19,75	19,75	500	522	Z 36	36	915	940	Z 54	54	1371	1400
Z 20	20	510	530	Z 36,5	36,5	925	950	Z 55	55	1400	1420
Z 21	21	530	560	Z 37	37	945	972	Z 56	56	1422	1450
Z 21,5	21,5	545	565	Z 37,5	37,5	950	975	Z 57	57	1450	1472
Z 22	22	560	585	Z 38	38	965	990	Z 58	58	1475	1500
Z 22,75	22,75	575	600	Z 38,5	38,5	975	1000	Z 59	59	1500	1522
Z 23	23	585	610	Z 39	39	990	1010	Z 59,5	59,5	1515	1540
Z 23,5	23,5	600	625	Z 40	40	1016	1038	Z 60	60	1524	1550
Z 23,75	23,75	605	630	Z 40,5	40,5	1030	1052	Z 61	61	1550	1572
Z 24	24	610	635	Z 41	41	1040	1060	Z 62	62	1575	1600
Z 24,75	24,75	620	645	Z 41,5	41,5	1050	1072	Z 63	63	1600	1625
Z 25	25	635	660	Z 41,75	41,75	1060	1082	Z 64	64	1626	1650
Z 25,5	25,5	650	680	Z 42	42	1070	1100	Z 65	65	1651	1680
Z 26	26	660	690	Z 42,5	42,5	1080	1102	Z 66	66	1675	1700
Z 26,5	26,5	670	692	Z 43	43	1090	1115	Z 67	67	1700	1720
Z 27	27	685	710	Z 43,25	43,25	1100	1120	Z 68	68	1725	1750
Z 27,5	27,5	700	732	Z 44	44	1120	1142	Z 68,5	68,5	1740	1770
Z 28	28	710	735	Z 45	45	1145	1170	Z 69	69	1750	1780
Z 28,5	28,5	725	750	Z 45,5	45,5	1155	1180	Z 70	70	1775	1800
Z 29	29	735	760	Z 46	46	1170	1195	Z 71	71	1803	1832
Z 29,5	29,5	750	772	Z 46,5	46,5	1180	1202	Z 72	72	1830	1850
Z 30	30	760	787	Z 47	47	1194	1216	Z 73	73	1850	1872
Z 30,5	30,5	775	797	Z 47,75	47,75	1215	1237	Z 73,5	73,5	1875	1900
Z 30,75	30,75	780	800	Z 48	48	1225	1250	Z 76	76	1930	1950
Z 31	31	790	810	Z 48,5	48,5	1235	1255	Z 78	78	1975	2000
Z 32	32	815	842	Z 49	49	1245	1270	Z 79	79	2000	2022
Z 32,5	32,5	825	850	Z 49,5	49,5	1250	1280	Z 82	82	2095	2120
Z 33	33	840	865	Z 50	50	1270	1292	A 15	15	382	415
Z 33,5	33,5	850	872	Z 50,5	50,5	1285	1310	A 16	16	407	437

Shadowed belts of the same length can be used in matched sets.